



# DEEP CYCLE



## WPPDG12-115

### FEATURES&BENEFITS

- True deep cycle AGM-GEL technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate
- Carbon active material
- Electrolyte + Gel for longer cycle life
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration :long cycle life &High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



### ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
12	/	115	110	104	96	239	95	65

### PHYSICAL SPECIFICATIONS


Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
330/12.99	173/6.81	212/8.35	220/8.66	31.4/69.2	T11	ABS

Operating Temperature Range		
Discharge	Charge	Storage
-15°C~50°C(5°F~122°F)	0°C~40°C(32°F-104°F)	-15°C~40°C(5°F~104°F)

# WPPDG12-115

DEEP CYCLE AGM-GEL BATTERY

## DIMENSIONS

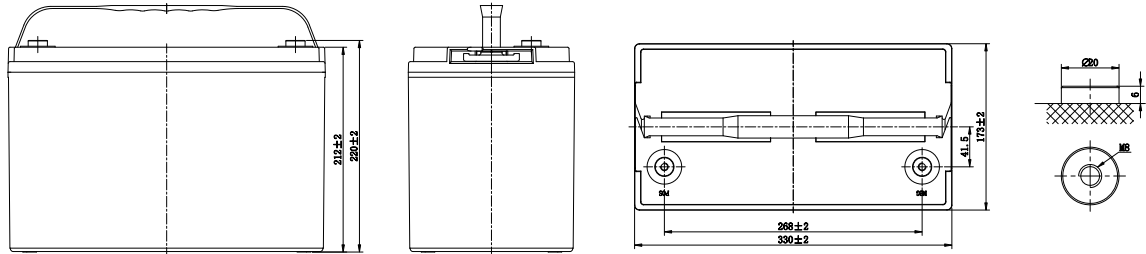


Terminal


Note: Terminal Torque Values in-lb(Nm):97.28-130.0(11-14.7)

## PERFORMANCE CHARACTERISTICS


Charging Profile

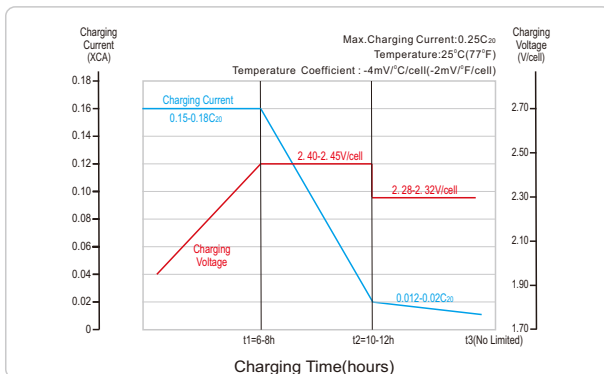

Relationship of OCV and State Of Charge (25°C, 77°F)

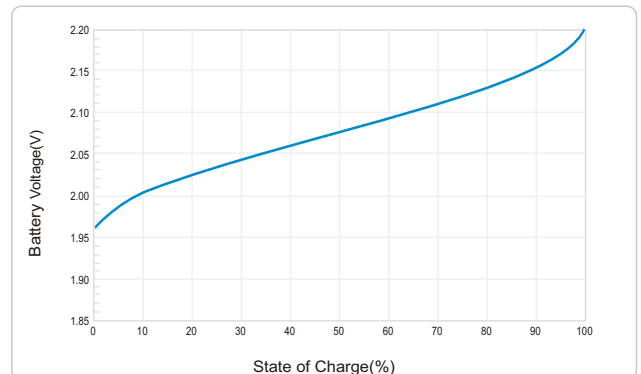

Cycle Life in Relation to Depth Of Discharge

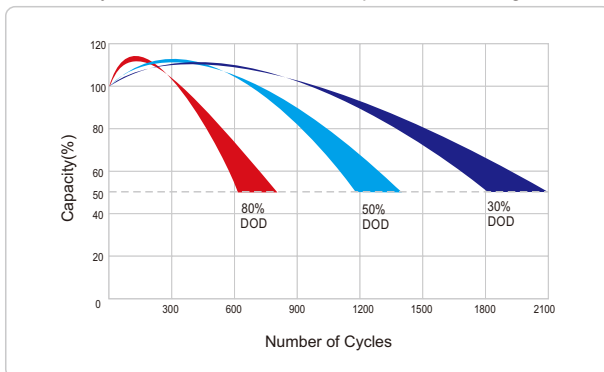

Self-discharge Characteristic

