



DEEP CYCLE



EVE1214

FEATURES&BENEFITS

- True deep cycle AGM-GEL technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate
- Carbon active material
- Electrolyte + Gel for longer cycle life
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration :long cycle life &High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
12	/	14.0	13.5	13.0	12.0	/	/	/

PHYSICAL SPECIFICATIONS


Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
151.5/5.96	99.5/3.92	97/3.82	100/3.94	4.00/8.82	M5	ABS

Operating Temperature Range		
Discharge	Charge	Storage
-15°C~50°C(5°F~122°F)	0°C~40°C(32°F-104°F)	-15°C~40°C(5°F~104°F)

EVE1214

DEEP CYCLE AGM-GEL BATTERY

DIMENSIONS

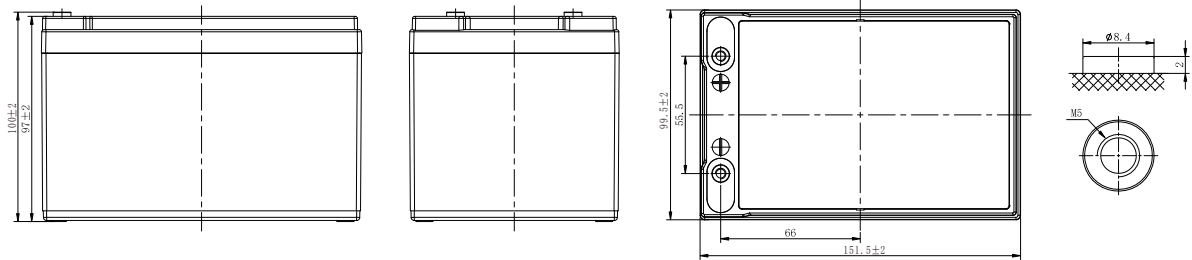


Terminal


Note: Terminal Torque Values in-lb(Nm):17.69-26.53(2.0-3.0)

PERFORMANCE CHARACTERISTICS


Charging Profile

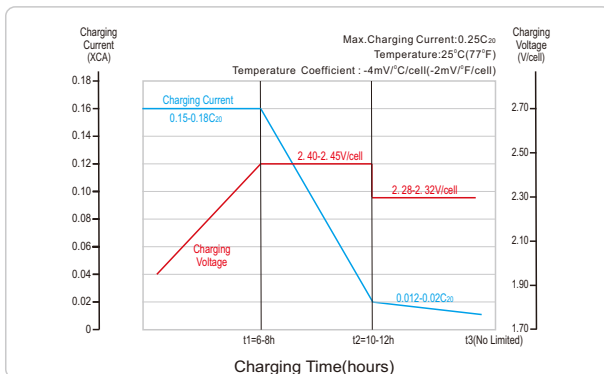

Relationship of OCV and State Of Charge (25°C, 77°F)

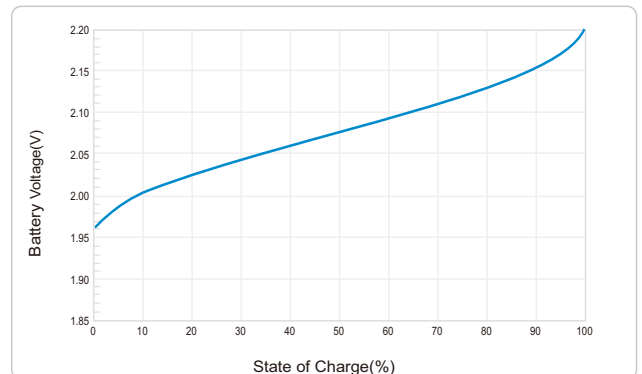

Cycle Life in Relation to Depth Of Discharge

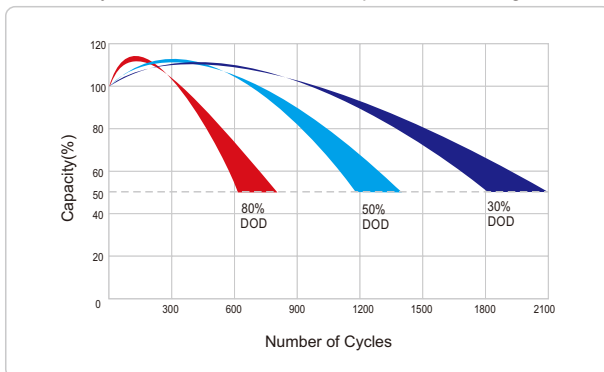

Self-discharge Characteristic

